




Stationary Compactor - C2HD

For heavy commercial and light industrial applications, the C2HD model is designed for durability and long life.

The BACE heavy duty units are built with massive structural reinforcement in the breaker bar and charge box areas.

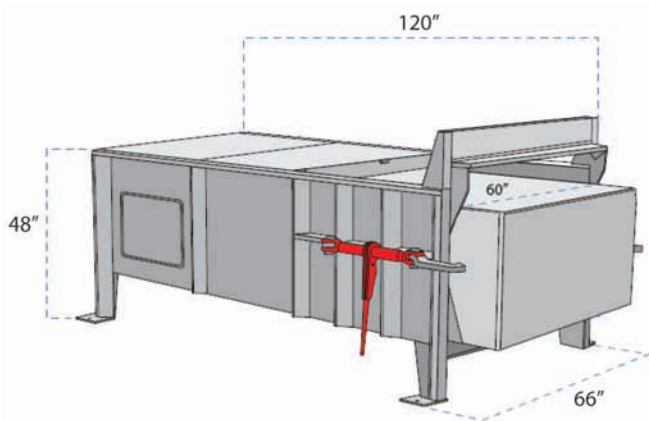

SPECIFICATIONS	
MFG Rating CU/YD	2
Ram Face (H"xW")	29 x 60
Ram Penetration (in)	11
Cylinder Bore//Stroke/Rod (in)	6 x 56 x 4
Motor (HP)	10
Pump GPM	10.5
Avg. Cycle Time (sec)	61
Clear Top Opening (in)	46 x 60
Discharge Opening (in)	37 x 60
Hydraulic Pressure PSI Normal/Maximum	2200/2600
Force Rating (lb) Normal/Maximum	62,300/67,900
Approx. Compactor Shipping Weight (lbs)	5700

CONSTRUCTION	
Charge Box Sides (in)	1/4
Charge Box Floor (in)	1/2
Ram Face (in)	5/8
Ram Bottom (in)	3/8
Ram Top (in)	3/8
Breaker Bar Structural Angle	6" x 8" x 1"

Available Options
Advanced / full lights
Auto timer start
Oil heater
Ozone odor control
Fabricated options
Doghouse, Hoppers, Chute, etc.

Due to continual product improvement BACE reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only.

Printed on recycled paper

M-3212009



Toll Free: (877) 506-BACE (2223)
www.BACECORP.com

BACE equipment is ETL certified/UL approved and meets or exceeds ANSI standard Z245.5.