




Stationary Compactor - C5

The C5 is designed for use in the most demanding commercial and industrial applications. The C5 develops up to 35 tons of packing force and with a 60" x 94" charge box opening, it is capable of accepting large bulky items such as crates, pallets, furniture, and large industrial discards.

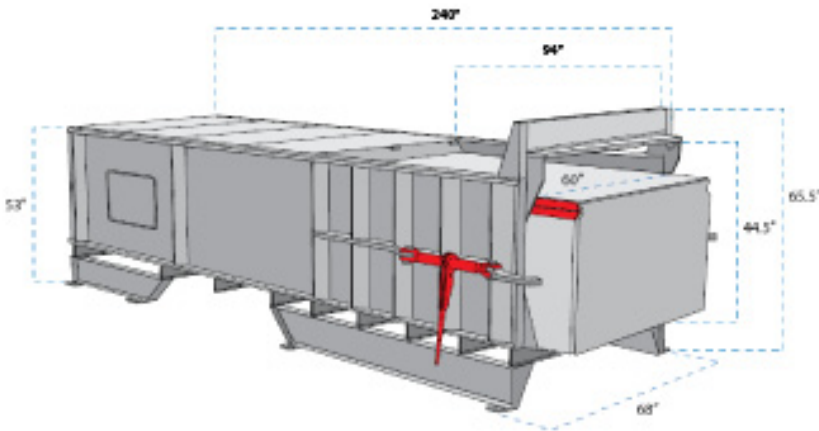

SPECIFICATIONS

MFG Rating CU/YD	4.22
Ram Face (H"xW")	34 x 60
Ram Penetration (in)	16
Cylinder Bore//Stroke/Rod (in)	7 x 110 x 4
Motor (HP)	20
Pump GPM	15
Avg. Cycle Time (sec)	120
Clear Top Opening (in)	60 x 94
Discharge Opening (in)	41 x 60
Hydraulic Pressure PSI Normal/Maximum	1700/2100
Force Rating (lb) Normal/Maximum	65,400/77,000
Approx. Compactor Shipping Weight (lbs)	10,200

CONSTRUCTION

Charge Box Sides (in)	1/4
Charge Box Floor (in)	1/2
Ram Face (in)	5/8
Ram Bottom (in)	1/2
Ram Top (in)	1/4
Breaker Bar Structural Angle	6" x 8" x 1"

Available Options

Advanced / full lights
Auto timer start
Oil heater
Ozone odor control
Fabricated options
Doghouse, Hoppers, Chute, etc.

Due to continual product improvement BACE reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only.

Printed on recycled paper

M-3212009



Toll Free: (877) 506-BACE (2223)
www.BACECORP.com

BACE equipment is ETL certified/UL approved and meets or exceeds ANSI standard Z245.5.