

Manufacturers Limited Warranty

BACE, LLC (herein referred to as "BACE") warrants parts and labor for a period of one (1) year from the Date of Shipment on all equipment.

BACE provides an additional two (2) years for parts replacement on major components (major components include cylinder, motor, pump and directional valve only), on all equipment except for OCC model Balers and Balers with 1 Phase Power Units, which are one (1) year parts and labor only.

BACE provides a total of five (5) years on all equipment for the structure/frame.

As limited herein, BACE warrants the equipment sold under this warranty to be free from defects in material and workmanship. This warranty does not apply to any defects caused by negligence, misuse, modifications, alterations, water damage to NEMA 12 components or accidents by purchaser or third parties. Warranty extends only to the original consumer and is non transferable. BACE reserves the right to void warranty if the provided warranty card was not fully completed and/or not returned to BACE within 14 days of Equipment Delivery. BACE reserves the right to determine if part(s) are genuine and/or defective. This warranty does not apply to any part that has been altered or repaired by any person not authorized by BACE, or which has been subjected to misuse, neglect or accident, or by any other cause beyond the control of the manufacturer.

This warranty excludes any obligation by BACE for loss of product, down time, or any other incidental or consequential damage incurred at any time.

BACE neither assumes nor authorizes anyone to assume for it any other obligation or liability in connection with such compactors or containers.

If BACE's installer/distributor are not on site at the time of equipment start-up, any labor or mileage obligation under this warranty will be voided.

THIS WARRANTY IS THE ONLY WARRANTY APPLICABLE TO BALERS, COMPACTORS AND CONTAINERS MANUFACTURED BY BACE AND IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

LIMITED WARRANTY INCLUDES:

- Repair, or replacement with a similar part, any part of the product of our manufacture which is returned to us within thirty (30) days after discovery of the defect, properly identified and transportation charges *prepaid*, and not more than 3 years, after purchase by original consumer.
- Shall furnish without charge, a similar genuine part to replace any part of a product of its manufacture, which proves to be defective in normal use and service during this period.
- Shall supply service labor for defective parts or workmanship with the manufacturer's equipment within the warranty period at the published BACE flat rate for mileage and labor.

LIMITED WARRANTY EXCLUDES:

- Any part(s) altered, redesigned or repaired by any person not authorized by BACE.
- Water damage from outside storage, installation or operation.
- Any defective part which is the result of neglect of improper maintenance, improper installation, misuse, accident vandalism, fire or any other cause beyond the control of the manufacturer
- Product of other manufacturers beyond such warranty as is made by such manufacturer is null and void from this warranty.
- Shipping and special handling charges to expedite part shipment.
Ejector Chains
- Limit Switch adjustments

Procedures for Warranty Claims

PROCEDURES FOR WARRANTY CLAIMS FOR DEFECTIVE PARTS:

ALL THE FOLLOWING PROCEDURES MUST BE FOLLOWED ON ALL PART RETURNS DURING THE WARRANTY PERIOD. FAILURE TO COMPLY WITH THE FOLLOWING PROCEDURES WILL ABSOLVE BACE OF SUCH CLAIMS. (SEE ATTACHED WARRANTY POLICY)

BACE CUSTOMER SERVICE: 877-506-BACE

Motors:

1. Once checked by a qualified technician who determines that no problems exist with fuses or wiring from incoming power source, then call BACE Service Department to notify us of the problem with the product model and serial number, and verify your warranty period and receive a warranty RGA number. We will then direct you to the nearest factory authorized motor diagnostic/repair facility.
2. If the factory facility determines that the problem is a factory defect, then the factory facility will replace the motor at no charge.
3. If it is determined that the motor problem was not due to a factory defect, then it will be the customer's responsibility to replace the motor.
4. BACE is not responsible for pick-up and delivery charges to the factory facility.

Hydraulic Cylinders:

1. Once checked by a qualified technician who determines that there is a problem with the cylinder, then call BACE Service Department to notify us of the problem with the product model and serial number, and verify your warranty period and receive a warranty RGA number.
2. BACE will at that time ship out a replacement cylinder from BACE or the cylinder manufacturer. Shipment will be normal freight rate, unless otherwise specified by the customer. For shipments other than normal freight (i.e. The determination of overnight shipping costs will be made solely by BACE.)
3. The customer is responsible for shipment of the defective cylinder, within 30 days, to BACE to determine the final warranty status.
4. In the event the cylinder is not received within the allotted time frame, then the customer will be billed the total amount of the replacement cylinder plus S & H.

All other parts:

1. Once checked by a qualified technician and determined that there is a problem with the part, then call BACE Service Department to notify us of the problem with the product model and serial number, verify your warranty period, and receive a warranty authorization number.
2. BACE will at that time ship out a replacement part from BACE or authorize the customer to purchase the part from an authorized distributor, factory warehouse. Shipment will be normal freight rate, unless otherwise specified by the customer. For shipments other than normal freight (i.e. The determination of overnight shipping costs will be made solely by BACE.)
3. It is the customer's responsibility to ship the defective part back to BACE within 30 days with the RGA#, at BACE's discretion.
4. If the part is not received in 30 days and or if the part does not pass warranty inspection, the customer will be invoiced for the part and BACE will not be held responsible for any charges for the corresponding repair.
5. All labor and travel will be paid per BACE's flat rate schedule. The work required to replace any part must first be authorized by BACE. (*See below for Flat Rate Schedule*).

The invoice from the customer must be itemized to include model, serial number of unit, work performed, an BACE warranty authorization number, location of equipment, labor hours & mileage.

Flat Rate Schedule for Labor and Mileage:

1. In all cases of replacement of parts, repair of structural components the customer is required to call in to BACE Service Department for a "Warranty Authorization Number." In cases where the work has begun and will exceed the Flat Rate Schedule more than 5% of the original estimate, you will be required to contact the Service Department for approval. In cases where the hours exceed the original flat rate schedule and/or work not authorized with a Warranty Authorization Number, that claim on the excess will be denied. NO CREDIT will be allowed for labor hours spent on the inspection or diagnosis of equipment problems.
2. In cases of structural repair by welding, re-fabrication, or modification of an existing design, an official authorization must be obtained from the BACE Service Department prior to work. The request must have the model number, serial number, brief description or drawing of work to be done.
3. Flat Labor Rate for warranty claims, service is \$50.00 per hour.
4. Travel time (man and truck) will be paid at the rate of \$.50 per mile. (Mileage is limited to a maximum of 200 round trip miles.)

Parts Which Have Been Replaced:

1. In the event that a part fails during the first twelve month's of the baler's warranty, the replaced part will be warranted for one (1) year from the time of installation. The labor to replace this part will be covered for 90 days after installation or the remainder of the original machine warranty, whichever is longer.
2. In the event that a part fails during the "part's only" period of a baler's original warranty, the replaced part will have a one (1) year warranty and the labor to replace this part will be covered for 90 days after installation.
3. In the event that a part fails outside of the baler's warranty, the replaced part will have a one (1) year warranty and the labor to replace this part will be covered for 90 days after installation.

CAUTION: Only factory original replacement parts or equivalent should be used to insure proper operation of equipment.

**FAILURE TO COMPLY WITH ALL OF THE ABOVE
PROCEDURES
WILL VOID ALL WARRANTY CLAIMS**

Pre-Operation

The Vertical Baler requires up to 10' x 12' of clear floor space and up to 14' of ceiling height for proper installation and operation.

This space should always be kept clear of materials which could interfere with the safe operations of the baler.

BALER IS SUPPLIED WITH NEMA 12 WATER RESISTANT CONTROLS AND MUST BE STORED, INSTALLED AND OPERATED IN A DRY ENVIRONMENT OR DAMAGE MAY OCCUR AND WARRANTY WILL BE VOIDED.

(Optional NEMA 4 Water Proof controls and Weather covers are available)

POSITIONING

Positioning the vertical baler so that the sufficient room is available for proper and safe operation. The back of the baler should be placed no less than 24 inches from any structure to allow room to insert wires and tie of the bale. Also, enough room in front of the baler must be present to allow the chamber door to swing fully open so the finished and tied bale can be ejected. **MUST BE STORED, INSTALLED AND OPERATED IN A DRY ENVIRONMENT OR DAMAGE MAY OCCUR.**

ANCHORING

BACE recommends mounting the baler on a pad of steel reinforced concrete with a minimum of 3000 psi capacity. The pad should be at least 4 inches deep. The baler should be anchored to the pad with 4 (**6 on XHD Models**) $\frac{3}{4}$ " anchor bolts 5" to 6" long. To allow for construction variances, the holes should be drilled after locating the baler in the desired position.

ELECTRICAL

A lockable fused disconnect switch (customer furnished) must be installed within 5 feet, and in the line of site of the baler electrical enclosure. This disconnect must be sized in accordance with the baler motor and voltage. (See *Figure 1.1 for Single Phase and Figure 1.2 for 3 Phase*)

HYDRAULIC

Check for any hydraulic oil leaks and make sure that all hoses are tight.

COMPLETION AND FINAL CHECK

Make sure all appropriate safety decals are present and in their proper locations. Check the baler motor is wired for the correct voltage. Check that motor rotation is clockwise. Check that the motor starter has the correct thermal overloads for the installed voltage. Check that the transformer is wired correctly for the voltage.

Maintenance Information


Note: BACE recommends that you maintain a record of your preventative maintenance inspections. Failure to perform regular maintenance may result in damage to the Baler.

DAILY:

- ✓ Inspect for Oil Leaks.
- ✓ Inspect Oil Level.
 - Note:** With the Platen Up, Hydraulic Tank should be $\frac{3}{4}$ full.
- ✓ Inspect the following for Loose, Damaged or Missing:
 - Bolts
 - Ejector Chains
 - Limit Switches
 - Welds
 - Safety Decals
 - Guards
 - E-Stop Switch
- ✓ Inspect for Debris:
 - Remove All Debris Around Baler
 - Remove All Debris From Top Of Platen

MONTHLY:

- ✓ Check for Signs of Wear:
 - Inspect Cylinder for Scars on Rod
 - Oil Leaks
 - Mounting Bolts are Tight
 - Door Hinges/Hand Wheel for excessive play
 - UHMW on Gate and Platen for *abnormal* wear (Repair or Replace if Required)
- ✓ Check Hydraulic Oil.
 - Should not be Cloudy or Milky in appearance (Replace if Required)
- ✓ Check Air Breather/Filter.
 - (Replace if Required)
- ✓ Check Oil Filter; located in the Hydraulic tank under the access panel.
 - Change Every 12 Months
- ✓ Check Hydraulic Fittings and Connections.
 - (Repair or Replace as Required)

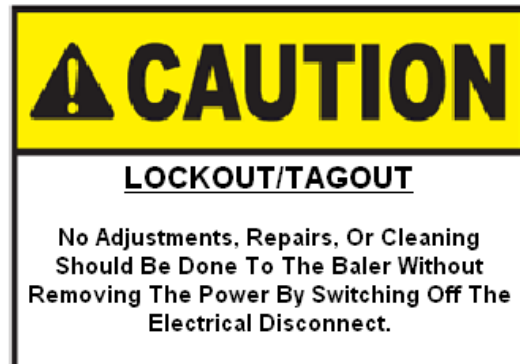

Parts List

POWER UNITS

BWG13015	15HP/3PH/208/230/460 WEG MOTOR
BWG13020	20HP/3PH 208/230/460 WEG MOTOR
BBA15540	15HP/3PH/575V BALDOR MOTOR
BBA16000	20HP/3PH/575 V BALDOR MOTOR
BNA60501	GEAR PUMP
BNA34505	DIRECTIONAL VALVE
BNK20040	3/4 A-B PORT SUB PLATE
BSU10000	RELIEF VALVE
BPD11200	4000PSI GAUGE
BUC21000	SUCKTION STRAINER 1"
BME12276	PRESSURE SWITCH
BMC12000	TRANSFORMER
BAB900130	CONTACTOR (MOTOR STARTER)
BAB900452	CONTACTOR OVERLOAD
BAA12125	RELAY
BID14000	RELAY BASE
BTE12000	PUSH BUTTON, GREEN
BTE12200	PUSH BUTTON, YELLOW
BTE13000	PUSH BUTTON, E-STOP
BAB13575	MAIN DOOR SWITCH
BAB13600	ANSI SWITCH
BAB1358	SAFETY GATE SWITCH
BTE83600	ON/OFF KEY SWITCH 2 POS
BTE10000	RESET BUTTON
BHBC	BREATHER CAP

CYLINDER

B63035	6" X 30" X 3.5"
B64835	6" X 48" X 3.5"
B7605	7" X 60" X 5"

HARDWARE PARTS

BECHVA	EJECTOR CHAIN ASSYEMBLY
BECQLVA	EJECTOR CHAIN QUICK LINK
BMGHVA	MAIN GATE HANDLE
BWTVA	WHEEL TURNBUCKLE
BGGTVA	GATE GUIDE TUBE ASSEMBLY (EACH)
BMGAVA	MAIN GATE ASSEMBLY
BUHMWVA	UHMW KIT
BSMBVA	SWITCH MOUNTING BRACKET

Warranty Registration

NOTICE

The installer must test each of the items indicated below and check them off as inspected in the column provided. The installer must sign in the space provided below that the tests have been completed.

Complete and mail to:

BACE

4827 Rozzelles Ferry Rd

Charlotte, NC 28216

*FORM MUST BE FILLED OUT AND MAILED
WITHIN 14 DAYS OF INSTALLATION*

MODEL	SERIAL NUMBER	INSTALLATION DATE	PURCHASE DATE	PURCHASED FROM

Purchasing Company _____ Contact Name _____

Address: _____ City: _____ State: _____ Zip: _____

Phone: _____ Fax: _____ Email: _____

Installer Pre-Delivery Check List:

EQUIPMENT MUST BE STORED, INSTALLED AND OPERATED IN A DRY ENVIRONMENT UNLESS OPTIONAL NEMA 4 CONTROLS ARE INSTALLED.

- Fuse disconnect and 12 ft. pigtail installed.
- Is supplied voltage compatible with baler specifications.
- Check full bale switch. (Run ram down, override full bale switch, at bottom baler should shut off)
- Check main door (door open, baler should shut off).
- Check safety gate (with baler running open safety gate and baler should stop).
- Check up stop (with platen moving up, press the UP stop switch and platen should stop).
- Check all electrical connections are tight.
- Check hydraulic level in sight glass.
- Check hydraulic hoses and fittings.
- Ejector system is ok.
- Baler is lagged down.
- Breather cap is installed.
- Safety decals in place.
- Owner/Operator has manuals, extra copies of electrical and hydraulic schematics and keys.
- Owner/Operator has been properly trained on the operation and safety features.

Installer Signature: _____ Date: _____