



BACE
BALER AND COMPACTION EQUIPMENT

Call Today: (877) 506-BACE
or visit us online at bacecorp.com



Vertical Balers: VMAXX-26 & VMAXX-45

The VMAXX-26 & VMAXX-45 are designed to meet the specifications of your client's back haul program without compromising the rigorous baling expectations of the backroom personnel.

These balers produce bales specifically weighted and dimensioned to fit 26 & 45 into a container improving container weights from the client's approximately 30,000 lbs. to over approximately 55,000 lbs thereby providing up to a 73% increase.

Key features:


1. Structural steel construction
2. CSA and UL Listed components with external motor-starter resets prevent personnel from having to open control boxes.
3. Gradual release-wheel locking-door mechanism
4. Side-mounted power unit for optimal and safe routine maintenance
5. Heavy-duty cylinders with 3 to 1 safety pressure rating and solid rod
6. Automatic-opening solid safety gate with user-friendly loading height
7. Roller chains and sprockets with oil-tight bearings for positive tracking and easier operation on counter-balanced solid safety gate operation
8. Fixed retainer dogs in the front and rear of the unit
9. Concealed limit and proximity safety switches
10. Semi-automatic chain-ejection system





BACE
BALER AND COMPACTION EQUIPMENT

Heavy Duty Vertical Balers: VMAXX-26 & VMAXX-45

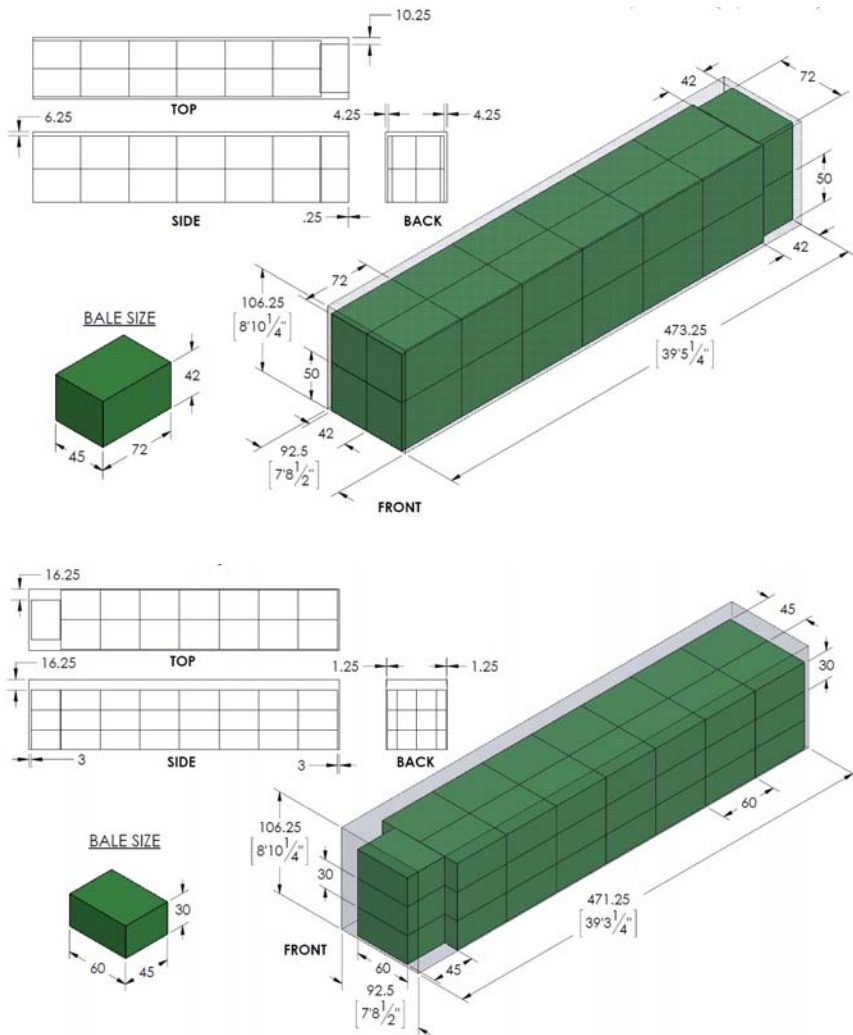

Specifications

	VMAXX-26	VMAXX-45
Performance		
Nominal Bale Size	72" x 42" x 45"	60" x 30" x 48"
Bale Weight	1700 to 2000 lbs OCC	1100 to 1400 lbs OCC
Bale Volume	79 cu. ft.	50 cu. ft.
No. of Bale Tie Slots	7 (18' by 12 GA.)	5 (14' by 12 GA.)
Average Cycle Time	55 seconds	55 seconds
Loading Height	54.5"	54.5"
Feed Opening	26"	26"
Full Bale Switch / Light	Standard	Standard

Hydraulic / Electrical

Motor HP	10 HP Submersible	10 HP Submersible
Voltage 3 Phase	208V, 230V, 480V	208V, 230V, 480V
Full Load Amps (A = Amps)	32A, 28A, 14A	32A, 28A, 14A
Dual Pump GPM	16/4	16/4
Normal System Pressure PSI	2500	2500
Max. System Pressure PSI	3000	3000
Compact Force lbs – Normal/Maximum	125,663 / 150,798	125,663 / 150,798
Platen Pressure	42 PSI	70 PSI
Cylinder Bore x Stroke	8" x 48"	8" x 48"
Hydraulic Tank Capacity Gallons	38 gallon	38 gallon

Additional hydraulic/electrical configurations are available. Please call BACE for more information.

Due to continual product improvement, BACE reserves the right to change specifications without notice. Information and images in this document are illustrative only. Printed on recycled paper. January 2015

Available Options

- IntelliBALE System™ (Patent Pending)
- Regen Circuitry
- Wire Guides (allows for front bale tie-off)
- Automatic Wire Feed Chutes
- Oil Heater
- Weather Proof Package



We meet or exceed
ANSI Standard Z245.5