



BACE

Revision Date: July 30, 2020

BACE Vertical Baler V63HDL P

This Low Profile vertical-downstroke unit is designed for customers with limited space while still producing up to 700 lbs. of OCC. This is a multi-material machine capable of baling paper, plastic, fiber, OCC and Non-Ferrous metals and other commercial applications.

Ideal for

- Big Box Retailers
- Commissaries
- Distribution Centers
- Grocery Stores
- Home Retailers
- Hospitals
- National Accounts
- Pharmacies
- Recyclers
- Schools
- Universities
- Warehouses



Order Today: (877) 506-BACE
or visit us online at www.bacecorp.com

322 West 32nd Street
Charlotte, NC. 28206

*BACE Balers meet existing ANSI Safety Standards
and are ETL & CETL Approved.*




LEARN MORE AT WWW.BACECORP.COM
Toll Free: (877) 506-BACE (2223) ▪ Fax: (704) 394-2210

BACE Vertical Baler V63HDLP

DIM. (in./mm)

- A. 36/914
- B. 87/2210
- C. 45.5/1154
- D. 105/2667
- E. 95/2413

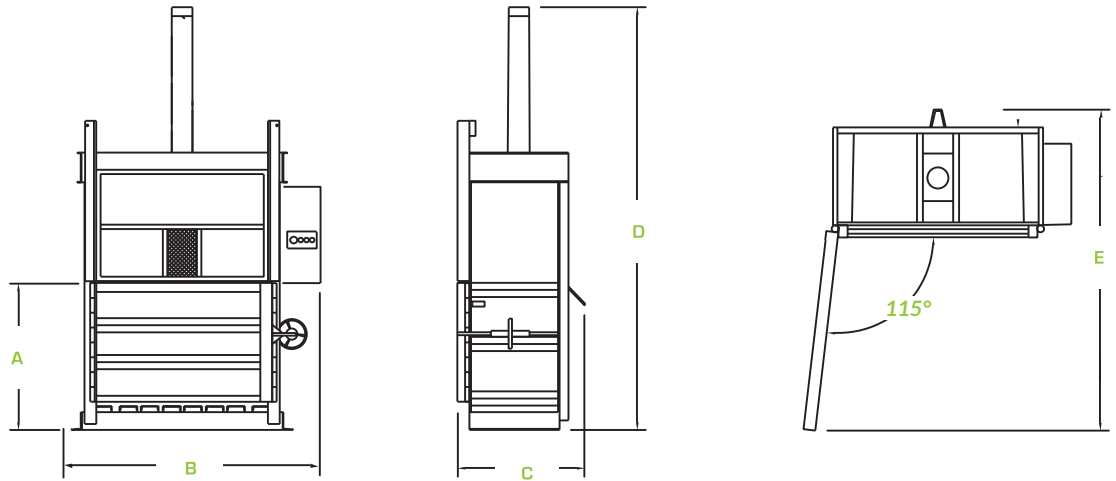

SPECIFICATIONS

PERFORMANCE

Nominal Bale Size	60" x 30" x 30"
Bale Weight	Up to 700 lbs OCC
Bale Volume	31 cu. ft.
No. of Bale Tie Slots	5
Compact Force lbs - Normal / Maximum	62,202/67,857
Platen Pressure	35 PSI
Average Cycle Time	25 Seconds
Loading Height	36"
Ejector System	Semi-Automatic
Full Bale Switch	Standard

HYDRAULIC / ELECTRICAL

Motor HP	10
Voltage 3 Phase	208V, 230V, 480V
Full Load Amps (A = Amps)	32A, 28A, 14A
Pump GPM	12 HiLo
Normal/Maximum System Pressure PSI	2200/2400
Cylinder Bore x Stroke	6" x 30"
Hydraulic Tank-Capacity Gallons	22

ADDITIONAL HYDRAULIC/ELECTRICAL CONFIGURATIONS ARE AVAILABLE. PLEASE CALL BACE FOR MORE INFORMATION.

Available Options

- Slotted Front Door
- Wire Guides (allows for front bale tie-off)
- Rear Feed Opening, Front Eject
- Feed Chute
- Counter Weighted Floppy Retainer Dogs
- Oil Heater
- Weather Proof Package

Due to continual product improvement BACE reserves the right to change specifications without notice.

The information and pictures used in the document are for illustrative purposes only.

Printed on recycled paper.