




Stationary Compactor - C2

The BACE C2, 2-yard compactor features a 46" x 60" clear charge box opening, 48" loading height, and 54,000 lbs. of compaction force. The C2 and a 40-yard compactor receiver container are the superior combination of recycling and waste handling equipment for such applications as distribution centers, warehousing and industrial facilities.

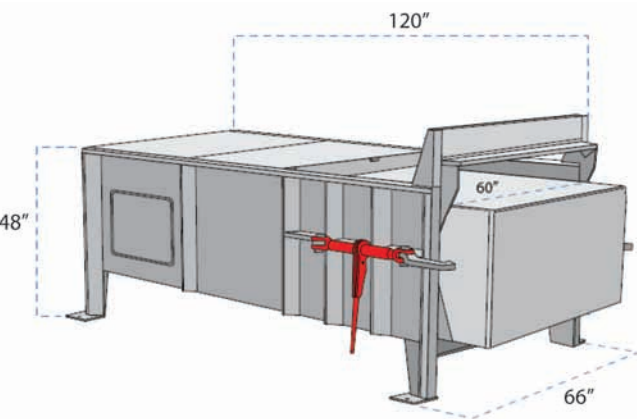

SPECIFICATIONS	
MFG Rating CU/YD	2
Ram Face (H"xW")	29 x 60
Ram Penetration (in)	11
Cylinder Bore//Stroke/Rod (in)	6 x 56 x 2 1/2
Motor (HP)	10
Pump GPM	10.5
Avg. Cycle Time (sec)	77
Clear Top Opening (in)	46 x 60
Discharge Opening (in)	47 x 60
Hydraulic Pressure PSI Normal/Maximum	1900/2300
Force Rating (lb) Normal/Maximum	54,500/63,900
Approx. Compactor Shipping Weight (lbs)	5500

CONSTRUCTION	
Charge Box Sides (in)	1/4
Charge Box Floor (in)	1/2
Ram Face (in)	1/2
Ram Bottom (in)	3/8
Ram Top (in)	1/4
Breaker Bar Structural Angle	6" x 8" x 1"

Available Options
Advanced / full lights
Auto timer start
Oil heater
Ozone odor control
Fabricated options
Doghouse, Hoppers, Chute, etc.

Due to continual product improvement BACE reserves the right to change specifications without notice. The information and pictures used in the document are for illustrative purposes only.

Printed on recycled paper

M-3212009



Toll Free: (877) 506-BACE (2223)
www.BACECORP.com

BACE equipment is ETL certified/UL approved and meets or exceeds ANSI standard Z245.5.