




BACE

BACE Stationary Compactor C2S

For heavy commercial and light industrial applications, the C2S model is designed for durability and long life. The BACE heavy duty units are built with massive structural reinforcement in the breaker bar and charge box areas.

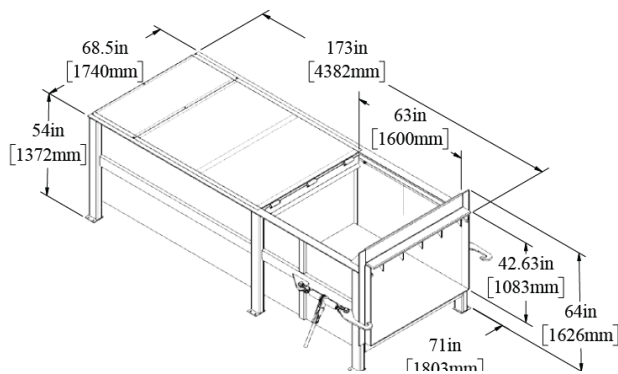

Available Options

- Advanced / Full Lights
- Auto Timer Start
- Doghouse, Hoppers, Chute, etc.
- Fabricated Options
- Oil Heater
- Ozone Odor Control

Order Today: (877) 506-BACE
or visit us online at www.bacecorp.com

200 Ratchford Rd.
York, SC 29745

*BACE Vertical Balers meet or exceed all existing
ANSI & OSHA Safety Standards and are totally
100% ETL & CETL Approved.*



LEARN MORE AT WWW.BACECORP.COM

Toll Free: (877) 506-BACE (2223) • Fax: (704) 394-2210
BACE equipment meets or exceeds ANSI standard Z245.5.

BACE Stationary Compactor C2S

SPECIFICATIONS

PERFORMANCE

MFG Rating CU/YD	2
Ram Face (H"xW")	30 x 60
Ram Penetration (in)	6
Cylinder Bore//Stroke	2X - 4 x 32
Motor (HP)	10
Pump GPM	10.5
Avg. Cycle Time (sec)	40
Clear Top Opening (in)	40 x 60
Discharge Opening (in)	37 x 60
Hydraulic Pressure PSI Normal/Maximum	1800 / 2200
Force Rating (lb) Normal/Maximum	45,241 / 55,294
Approx. Compactor Shipping Weight (lbs)	4500

CONSTRUCTION

Charge Box Sides (in)	3/16
Charge Box Floor (in)	1/2
Ram Face (in)	3/8
Ram Bottom (in)	3/8
Ram Top (in)	1/4
Breaker Bar Structural Angle	4" x 6" x 3/4"

ADDITIONAL HYDRAULIC/ELECTRICAL CONFIGURATIONS ARE AVAILABLE. PLEASE CALL BACE FOR MORE INFORMATION.

*Due to continual product improvement BACE reserves the right to change specifications without notice.
The information and pictures used in the document are for illustrative purposes only.
Printed on recycled paper.*